


## XL 280 ST

## Multimedia Projector

Business & Education

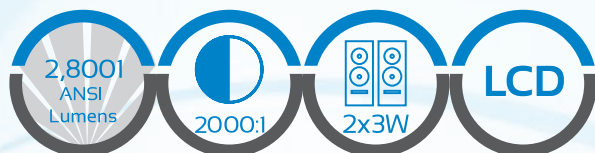

The Specktron XL 280 ST is a short throw projector ideal for small to medium sized rooms as it can display an 81.5" diagonal image from just 1m away. The XL 280 ST features LCD technology and XGA resolution. It offers a brightness of 2800 ANSI lumens and a contrast ratio of 2000:1. The projector is also equipped with a 2 x 3W speaker making your presentations sound spectacular.

### KEY FEATURES

|                |                  |
|----------------|------------------|
| Technology     | 3LCD             |
| Brightness     | 2800             |
| Resolution     | XGA (1024 x 768) |
| Contrast Ratio | 2000:1           |
| Lamp Life      | 4000 hours (Eco) |
| Weight         | 3.7kg            |



## SPECIFICATIONS

|                             |  |
|-----------------------------|--|
| Display Technology          | 3LCD   |
| Display Panel Type          | LCXIII AAJ/ABJ -6/7/8  |
| Display Panel               | 3 x 0.63"  |
| Brightness                  | 2,800 ANSI lumens  |
| Native Resolution           | XGA (1024 x 768)   |
| Contrast Ratio              | 2000:1   |
| Lens                        | F=1.8, f=8.08mm  |
| Uniformity                  | 85%  |
| Throw Ratio                 | 81.5" @1m  |
| Image Size / Throw Distance | 0.598 ~ 1.363m (50" ~ 100")  |
| Aspect Ratio                | 4:3 Standard, 16:9 Compatible  |
| Keystone                    | Manual Keystone: $\pm 15^{\circ}$  |
| Input                       | VGA*2, YCbCr, Video, S-Video, Audio: 3.5 (Mini Jack), RCA*2  |
| Output                      | VGA (INPUT2)   |
| Control                     | RS232  |
| PC Compatibility            | VGA, SVGA, XGA, SXGA, WXGA, UXGA, Mac  |
| Video Compatibility         | PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, 480i, 480p, 576i, 576p, 720p, 1035i and 1080i   |
| Lens Shift Horizontal       | No   |
| Lens Shift Vertical         | No   |
| Lamp                        | 230W USHIO   |
| Lamp Life                   | Normal 3000H, Eco 4000H  |
| Remote Control              | Yes  |
| Horizontal Frequency        | 15 ~ 100 kHz   |
| Vertical Frequency          | 48 ~ 85 Hz   |
| Standby Power               | <1W  |
| Power Supply                | 100V - 240V @ 50-60 HZ   |
| Power Consumption           | 280W   |
| Operating Temp              | 5°C to 35°C  |
| Store Temp                  | -10°C to 60°C  |
| Speaker                     | Stereo 2 x 3W  |
| Dimensions                  | 361.5 x 314.2 x 92 mm  |
| Weight                      | 3.7 kg.  |
| OSD Languages               | English / Arabic / Farsi / French / German / Italian / Spanish / Russian / Chinese / Japanese / Korean / Finnish / Dutch / Turkish / Portuguese / Thai / Vietnamese / Afrikaans / Indonesian |